

AE700-IPS24GE4GC-M

24-Port 10/100/1000Mbps Industrial Managed PoESwitch with 4 Gigabit Combo



Ports: Provide 24*10/100/1000Mbps PoE ports with 4 Gigabit RJ45 and 4-1.25G SFP Combo

PoE Standard: IEEE802.3af/at/bt Power over Ethernet (PoE) Compliant

Self-adaption: RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX
Industrial Installation: Rack mounting installation

Wide Application: Designed for Railway, traffic etc some Industrial environment

Surge protection: Protect the device from lighting surges and others electrical hazards

Managed: Support remote web managed, VLAN and storm control and IPV6 management etc.

Working Temperature: -40 to 85 degrees operating temperature

Considerate Design: IP40 Industrial design with dual power input


Environmentally Hardened Design

With the IP40 metal industrial case which provides a high level of immunity against electromagnetic interference and heavy electrical surges, Being able to operate under the temperature range from -40 to 85 degrees C, the AE700-IPS24GE4GC-M can be placed in almost any difficult environment.



Cost-effective IPv6 Managed Gigabit PoE Switch Solution

With layer 2+ managed Gigabit PoE Switch, It provide IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

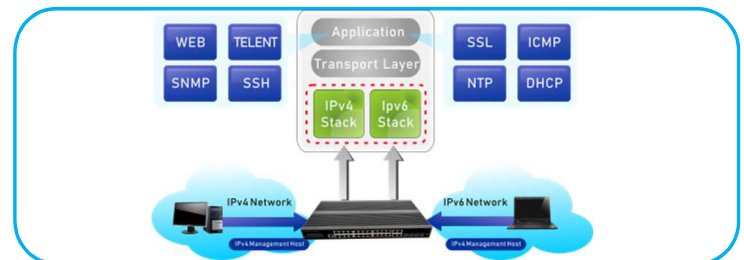

Surge Protection Design

provides contact discharge of $\pm 8\text{KV}$ DC and air discharge of $\pm 16\text{KV}$ DC for Ethernet ESD protection. It also supports $\pm 6\text{KV}$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.



Robust Layer 2 Features

The AE700-IPS24GE4GC-M can be programmed for advanced switch management functions, such as dynamic port link aggregation, Multiple Spanning Tree Protocol (MSTP), Layer 2/4 QoS, bandwidth control and IGMP/MLD snooping.



AE700-IPS24GE4GC-M

24-Port 10/100/1000Mbps Industrial Managed PoESwitch with 4 Gigabit Combo

Technical Datasheet

Hardware Specifications	
Connector	24* 10/100/1000BASE-T RJ45 auto MDI/MDIX ports 4* 10/100/1000BASE-T RJ45 auto MDI/MDIX ports 4 1000 Base-X SFP Slots Combo
LED Display	Power Indicator: PWR(green).Network Indicator: Link(yellow)
Thermal Fan	Fan less Design
Installation	Din Rail
Switch Architecture	Store and Forward
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex
Switch Performance	Backplane bandwidth 128Gbps
	Packet forwarding rate 47.62Mpps
	MAC address 16k
Power requirement	DC 12V~72V and AC100-280 V dual power
ESD Protection	6KV ESD
Dimension(W×D×H)	440mm x 290mm x 44.5mm(17.32in x 11.42in x1.75in)
Weight	<5kg
Standards Conformance	
Network standard	IEEE802.3i 10 BASE-T IEEE802.3u 100 BASE-TX IEEE802.3ab 1000BASE-T IEEE802.3x Flow Control IEEE802.3az EEE
Stability Testing	FCC CFR47 Part 15, EN55022/CISPR22, Class A EMS: IEC61000-4-2 (ESD): ±8kV (contact), ±15kV (air) IEC61000-4-3 (RS): 10V/m (80MHz-2GHz) IEC61000-4-4 (EFT): Power Port: ±4kV; Data Port: ±2kV IEC61000-4-5 (Surge): Power Port: ±2kV/DM, ±4kV/CM; Data Port: ±2kV IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz) IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s) IEC 60068-2-32 (free fall) IEC 60068-2-27 (shock) IEC 60068-2-6 (vibration)
Layer 2 Functions	
Port Mirroring	TX / RX / both Many-to-1 monitor
Vlan	802.1Q tagged-based VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs 802.1ad Q-in-Q tunneling Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP

AE700-IPS24GE4GC-M

24-Port 10/100/1000Mbps Industrial Managed PoESwitch with 4 Gigabit Combo


Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol
IGMP Snooping	IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL 8 mapping ID to 8 level priority queues
QoS	--- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet Traffic classification based, strict priority and WRR
Security	IEEE 802.1X port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS / TACACS+ user access authentication IP-MAC port binding MAC filtering Static MAC address DHCP Snooping and DHCP Option82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection IP source guard
Management Function	
Basic Management Interfaces	Web browser / Telnet / SNMP v1, v2c, V3 Firmware upgrade by HTTP / TFTP protocol through Ethernet network Remote / Local Syslog, System log, LLDP protocol, SNMP
Secure Management Interfaces	SSH, SSL, SNMP
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2674 Bridge MIB Extensions RFC 2737 Entity MIB (Version 2) RFC 2819 RMON (1, 2, 3, 9) RFC 2863 Interface Group MIB RFC 3635 Ethernet-like MIB
Environment	
Safety	FCC Part15 Class A, CE, RoHS
Environment specification	Operating temperature: -40°C~85°C, operating humidity: 5%~95% Storage temperature: -40°C~85°C, storage humidity: 5%~95%

AE700-IPS24GE4GC-M

24-Port 10/100/1000Mbps Industrial Managed PoESwitch with 4 Gigabit Combo


Installation Models

• Ipower Termina




- 4-pin 3.81mm-spacing plug-in terminal
- 12V-72VDC wide voltage input
- P1&P2 dual power input
- Reverse protection


• Ipower AC




• Rack Mounting

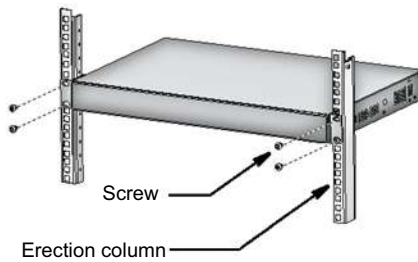

Mechanical Drawing

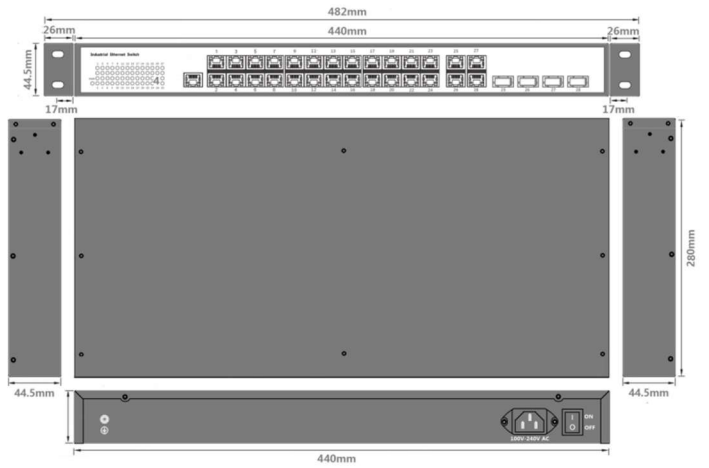

Applications

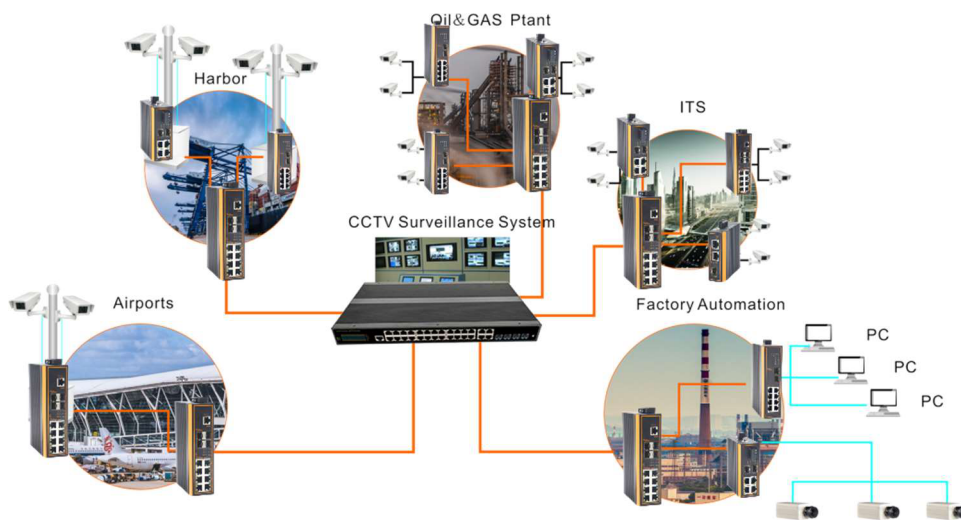

Ordering Information

AE700-IPS24GE4GC-M

24 Ports 10/100/1000Mbps Industrial Managed PoE switch With 4 Gigabit RJ45 and 4 Gigabit SFP Combo