

AEIN-PS1010PRO

8-Port FE PoE+ Switch with 2 Gigabit Uplink



- Ports:** Provide 8*10/100Mbps PoE ports and 2 *1000Mbps Uplink
- PoE Standard:** IEEE802.3af/at Power over Ethernet (PoE) Compliant
- Total Power:** Total power budget of 120W and 30W for all single PoE ports
- Self-adaption:** RJ45 port supports 10/100Mbps Auto MDI/MDIX
- Extend Mode:** Extend PoE up to 250m on one single cable
- Wide Application:** Designed for Wi-Fi AP, IP Security Camera, VoIP etc.
- Surge protection:** Protect the device from lightning surges and other electrical hazards
- Considerate Design:** Exquisite compact size with fanless design
- Easy to use:** Plug and play, No configuration required


Versatile PoE Port

Featuring 8*10/100Mbps PoE ports which support IEEE802.3af/at standard and 2*1000Mbps Uplink ports. The PoE switch provides maximum power budget of 120W and 30W for single PoE ports respectively, allowing users to have several different Networking products configured.



Flexible Extend Mode

With the extend mode, the PoE Switch Series is able to offer more flexible choices for long range transmission, extending the distance up to 250m, which is greatly helpful to bring better user experience.

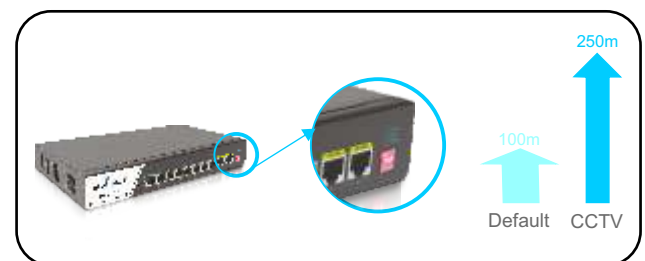

Surge Protection Design

Reaching 6KV surge protection, the PoE ports owns the capacity to keep the PoE Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.



AEIN-PS1010PRO

8-Port FE PoE+ Switch with 2 Gigabit Uplink

TECHNICAL DATASHEET

Model	AEIN-PS1010PRO	
Hardware Specifications		
Network Connector	8 10/100BASE-T RJ45 auto MDI/MDIX ports 2 10/100/1000BASE-T RJ45 auto MDI/MDIX ports	
PoE Port	8 10/100Mbps POE PSE port	
LED Display	Power Indicator: PWR(green). Network Indicator: Link(yellow) PoE Working Indicator: PoE(green)	
Thermal Fan	Fanless Design	
LED indicators	Power Indicator: PWR(green). Network Indicator: Link(yellow) PoE Working Indicator: PoE(green)	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	7.6Gpps
	Packet forwarding rate	4.2Mpps
	MAC address	4k
Power requirement	AC100-240V 50/60Hz	
ESD Protection	6kV ESD	
Dimension(W×D×H)	281mm x 141mm x 44mm	
Weight	0.82Kg	

Power over Ethernet (PoE) Specifications

Network standard	IEEE802.3i 10 BASE-T IEEE802.3u 100 BASE-TX IEEE 802.3ab Gigabit 1000BASE-T IEEE802.3x Flow Control IEEE802.3af Power over Ethernet IEEE802.3at Power over Ethernet IEEE802.3az EEE
PoE Standard	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Supply Type	1/2(+), 3/6(-) End-span
PoE Power Output	Per Port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af) Per Port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)
PoE Power budget	120W
Special Features	AI Detect and Reboot IPC, APs and PDs Intelligent PoE Port Priority Mechanism

AEIN-PS1010PRO

8-Port FE PoE+ Switch with 2 Gigabit Uplink


Environment

Safety	FCC Part15 Class A,CE,RoHs
Environment specification	Operating temperature: -10°C~45°C, operating humidity: 10%~90% Storage temperature: -20°C~70°C, storage humidity: 5%~95%


Interfaces



Structure Diagrams

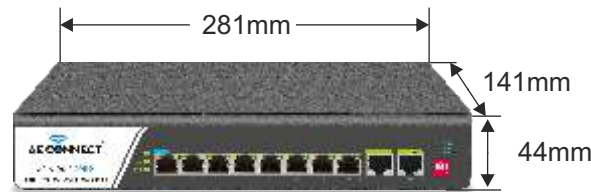

Applications

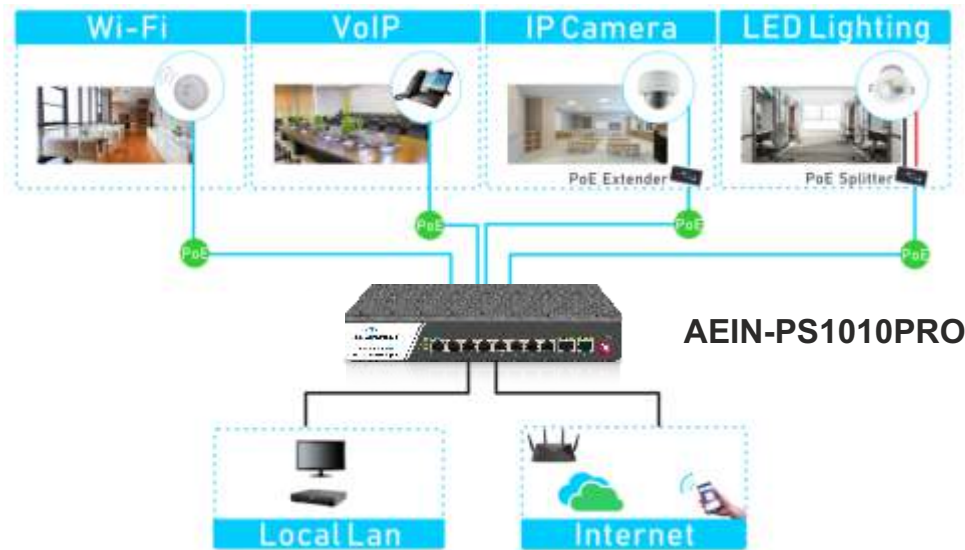

Ordering Information

AEIN-PS1010PRO	8 Ports 10/100Mbps PoE Switch with 2 Gigabit Uplink, 6kV surge protection, IEEE802.3af/at
----------------	---

Specifications are subject to change without notice. AE CONNECT is a registered trademark of Ashutosh Enterprise and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2022 Ashutosh Enterprise. All rights reserved. E&OE.